

DIGITAL COUNTERS

DIGITAL COUNTER

MODEL E402400

FEATURES

- 8 Digit 0.275" High LCD Display
- Battery Life: Ten Years
- Custom CMOS Technology

SPECIFICATIONS

ELECTRICAL

Power Internal Lithium Battery, 10 Yr. life
 Count Input Contact Closure or Open Collector
 Low Speed 30Hz. max.
 Min. Pulse 12 microseconds
 Current Consumption 15 microAmps max. at 3V
 Reset Pushbutton Enable Terminals 1 & 2
 Reset - Remote Contact Closure to terminals 1 & 3
 Min. Pulse 15 microseconds
 Memory Yes


PHYSICAL

Case Material ABS Cyclolac
 Front Panel Rated Nema 4
 Mounting Plastic Clip
 Operating Temp. -14°F to +140°F...-10°C to +60°C
 Ambient Humidity 80% RH non-condensing
 Weight 1.77 oz.

WARNING!
 This product contains a lithium battery and must not be cut open, disposed of in a fire or exposed to temperatures outside the range of -4°F to 140°F (-20°C to 60°C)



DIMENSIONS

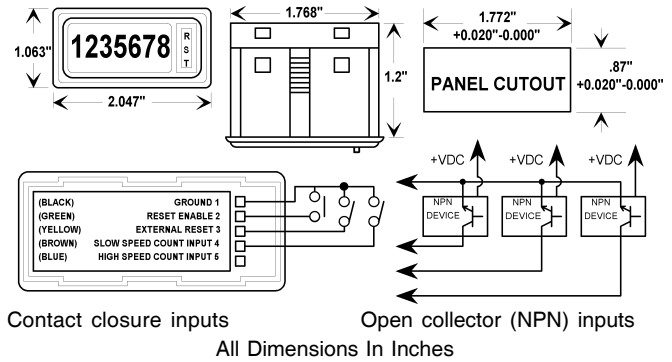

ELAPSED TIME METER

MODEL 240

FEATURES

- 3 1/2", 6 Digit Counter
- 5/32" High Digits showing hours and tenths of hours, or minutes and tenths of minutes

3 1/2"

SPECIFICATIONS

Accuracy Matches Frequency Control of Power System
 Vibration Shock Meets ANSI Specification C39.1 Materials
 Case Clear Polycarbonate
 Frame Black Polycarbonate
 Front Cover Polycarbonate
 Terminals Brass Terminal Studs
 Input Range 120 or 208/240 or 480 Volts Ac, 60Hz.
 Sealing Non Reset Types are Weather Resistant.
 Sealed window and no-through screw holes for flange or back-of-panel mounting protect motor, counter, and gearing from rain or panel wash-down.
 Insulation Level Operating at 120, 208, 240 or 480 Volts Ac, will pass Hi-pot of 2000Vrms for one minute.
 Burden 3 VA Typical
 Motor Synchronous



NON RESET TYPE



VOLT AC	REGISTER IN MINUTES	REGISTER IN HOURS
120	240-313-AAAB	240-311-AAAB
240	240-313-ABAB	240-311-ABAB
480	240-313-ACAB	240-311-ACAB

RESET TYPE

VOLT AC	REGISTER IN MINUTES	REGISTER IN HOURS
120	240-314-AAAB	240-312-AAAB
240	240-314-ABAB	240-312-ABAB
480	240-314-ACAB	240-312-ACAB

DIMENSIONS

MOUNTING/PANEL DRILLING

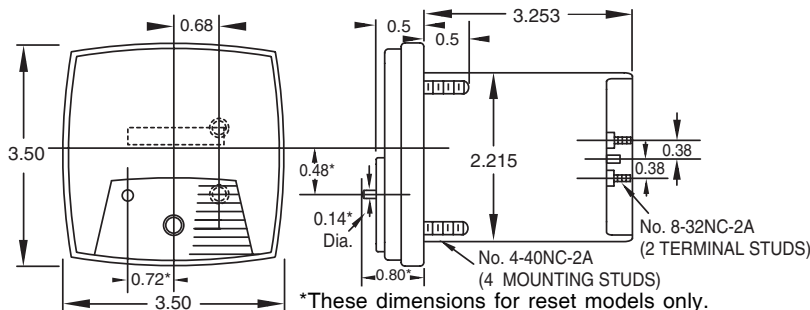

FLEX-CORE®

Div. Morlan & Associates, Inc.

6625 McVey Blvd. Columbus, Ohio 43235

WWW.FLEX-CORE.COM

sales@flex-core.com

PHONE (614) 889-6152

TECH. ASSISTANCE (614) 876-8308

FAX # (614) 876-8538

DIGITAL COUNTERS