

CURRENT TRANSFORMERS

SOLID CORE CURRENT TRANSFORMERS

MODELS 58-7-76

600V CLASS

FEATURES

- Manufactured to meet requirements of UL1244 and revisions.
- Flexible leads are UL1015 105°C CSA approved.

APPLICATIONS

- For use with PC series and Model W Watt and Watt/Watt Hour transducers.
- Ideal for use with Ammeters, Watt and Current Transducers.

SPECIFICATIONS

Frequency 50 to 400 Hz.
 Insulation Class 0.6KV BIL 10KV full wave
 Leads UL1015 105°C CSA approved,#16 AWG, 24"



All models on this page UL recognized

50 TO 400 HERTZ CURRENT TRANSFORMERS

CURRENT RATIO	MODEL NUMBER	ACCURACY AT 60HZ. (%)	BURDEN AT 60HZ. (VA)	WT. (LBS)
50:5	58-500	3.0	1.5	1.22
100:5	58-101	1.5	5.0	1.28
150:5	58-151	1.0	7.5	1.35
200:5	58-201	1.0	12.5	1.37
250:5	58-251	1.0	12.5	1.39
300:5	58-301	1.0	15.0	1.41
400:5	7-401	1.0	15.0	1.47
500:5	7-501	1.0	25.0	1.53
600:5	7-601	1.0	30.0	1.59
800:5	7-801	1.0	35.0	1.61
1000:5	76-102	1.0	10.0	0.65
1200:5	76-122	1.0	10.0	0.73
1500:5	76-152	1.0	12.5	0.86
2000:5	76-202	1.0	15.0	1.10









MODEL 58



MODEL 7



MODEL 76

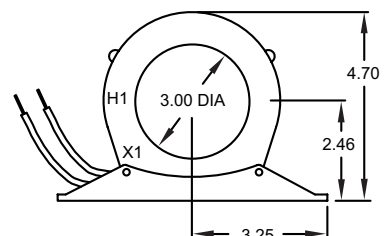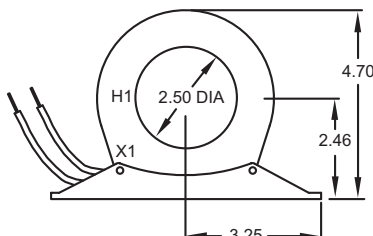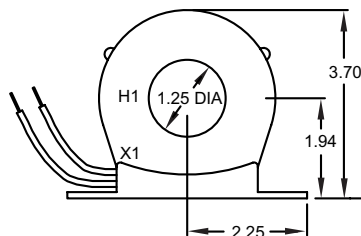

All Dimensions In Inches

FLEX-CORE®
 Div. Morlan & Associates, Inc.
 6625 McVey Blvd. Columbus, Ohio 43235

WWW.FLEX-CORE.COM
 sales@flex-core.com

PHONE (614) 889-6152
TECH. ASSISTANCE (614) 876-8308
FAX # (614) 876-8538