

CURRENT TRANSFORMERS

MULTI-RATIO RELAY CLASS

MODEL 781MR

FEATURES

- UL Recognized
- Window I.D. - 6.5"
- Relaying Applications
- Fits Many Switchgear Applications



MULTI-RATIO




600V CLASS

SPECIFICATIONS

Frequency 50-400Hz
 Insulation Class 0.6KV, BIL 10KV Full Wave
 Terminals Brass Studs No. 10-32 UNC
 with one flat washer, lockwasher
 Weight Approximately 31 lbs.


APPLICATION AND ORDERING DATA													
CATALOG NUMBER	MULTIPLE CURRENT RATIOS										RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
												@30°C	@55°C
781-601MR	50:5	100:5	150:5	200:5	250:5	300:5	400:5	450:5	500:5	600:5	C100	2.0	1.5
781-122MR	100:5	200:5	300:5	400:5	500:5	600:5	800:5	900:5	1000:5	1200:5	C200	2.0	1.5
781-202MR	300:5	400:5	500:5	800:5	1100:5	1200:5	1500:5	1600:5	2000:5	-	C200	1.5	1.33
781-302MR	300:5	500:5	800:5	1000:5	1200:5	1500:5	2000:5	2200:5	2500:5	3000:5	C200	1.5	1.33
781-402MR	500:5	1000:5	1500:5	2000:5	2500:5	3000:5	3500:5	4000:5	-	-	C200	1.5	1.33

DIMENSIONS

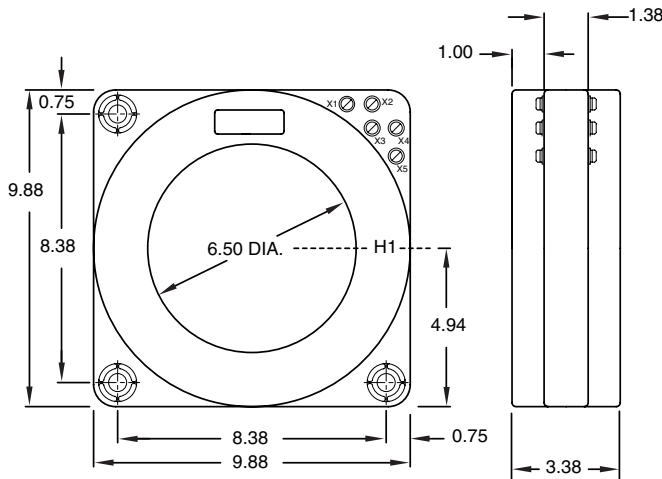


All Dimensions In Inches

EXCITATION CURVE (781-601MR)

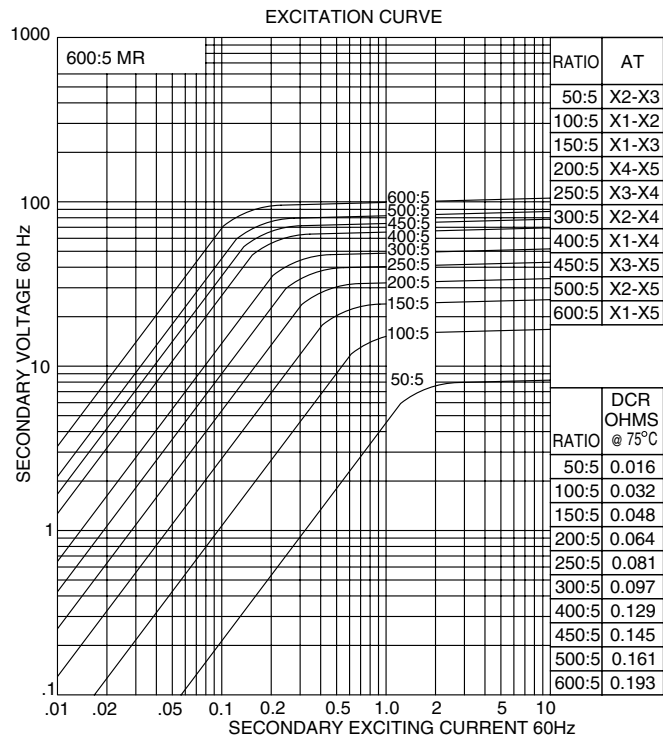

CONNECTIONS

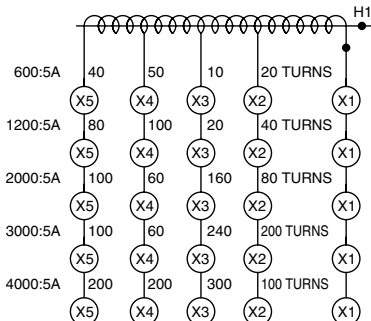

FLEX-CORE®
 Div. Morlan & Associates, Inc.
 6625 McVey Blvd. Columbus, Ohio 43235

WWW.FLEX-CORE.COM
 sales@flex-core.com

PHONE (614) 889-6152
 TECH. ASSISTANCE (614) 876-8308
 FAX # (614) 876-8538


CURRENT TRANSFORMERS

EXCITATION CURVES


MODEL 781MR

CURRENT TRANSFORMERS


MODEL 781-122MR

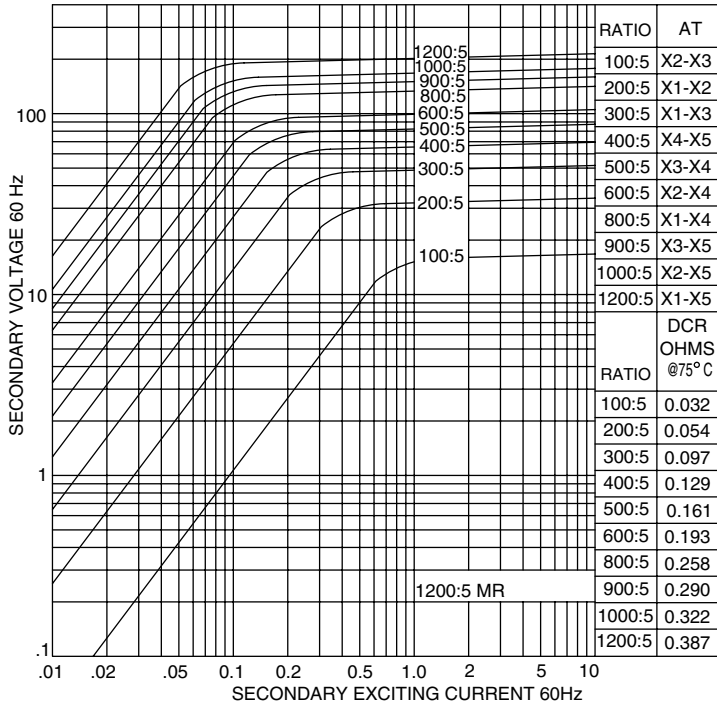

MODEL 781-202MR

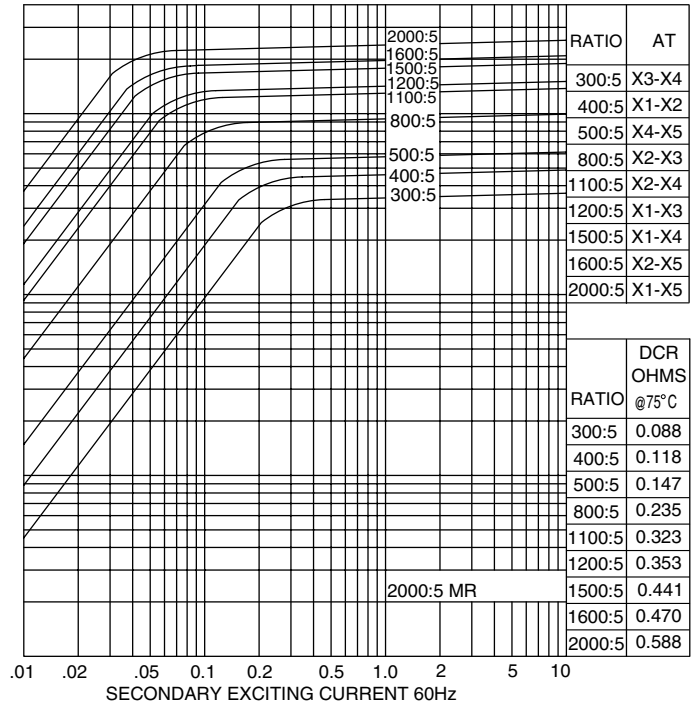

MODEL 781-302MR

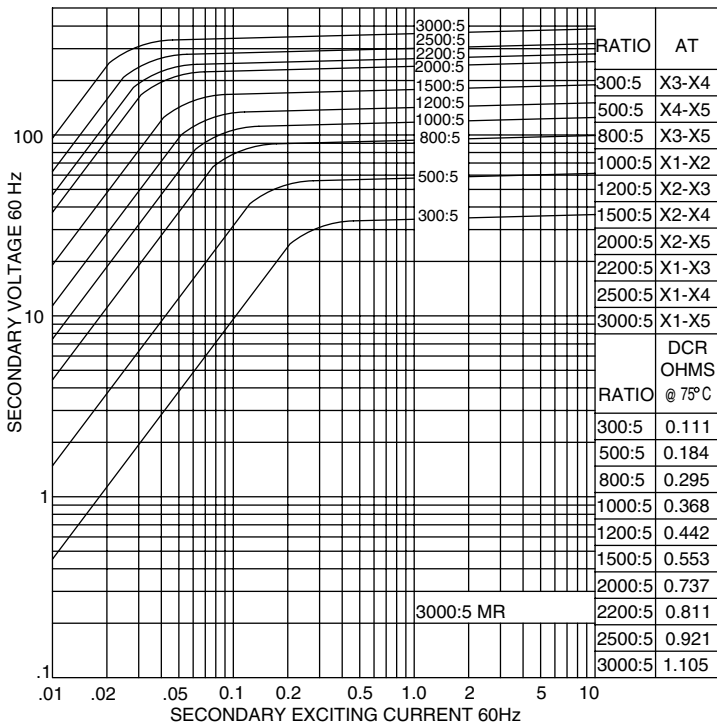

MODEL 781-402MR

