

SHUNTS

DC SHUNTS

MODEL S


DESCRIPTION

- For inputs to shunt rated DC ammeters, DC watt transducers (model MT) and shunt isolators (model VT7)
- Available in 50mV or 100mV models.
- +/- 0.25% of calibrated accuracy



50mV Shunts			100mV Shunts		
Amps	Catalog No.	Ref. Fig.	Amps	Catalog No.	Ref. Fig.
10	S50-010	A	10	S100-010	A
15	S50-015	a	15	S100-015	A
20	S50-020	A	20	S100-020	A
30	S50-030	A	30	S100-030	A
50	S50-050	A	50	S100-050	A
100	S50-100	A	100	S100-100	A
200	S50-200	B	200	S100-200	B
300	S50-300	B	300	S100-300	B
500	S50-500	B	500	S100-500	B
750	S50-750	C	750	S100-750	C
1000	S50-1000	C	1000	S100-1000	C
1200	S50-1200	C	1200	S100-1200	C

DIMENSIONS

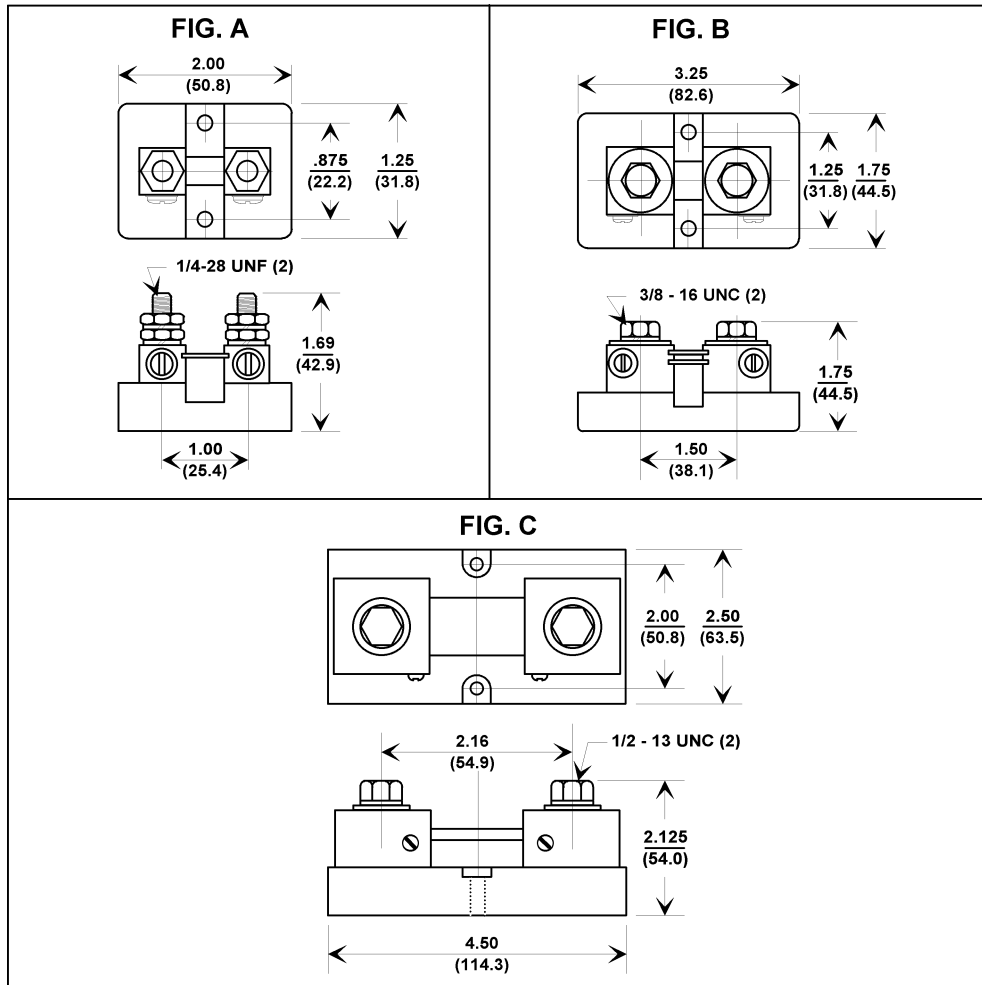

SHUNTS

FLEX-CORE®

Div. Morlan & Associates, Inc.

6625 McVey Blvd. Columbus, Ohio 43235

WWW.FLEX-CORE.COM

flexcore@msn.com

PHONE (614) 889-6152

TECH. ASSISTANCE (614) 876-8308

FAX # (614) 876-8538