

# CURRENT TRANSFORMERS

## SOLID CORE CURRENT TRANSFORMERS

MODEL AL

### FEATURES

- UL Recognized
- Window I.D. - 1.05"
- Use with Ammeters


600V CLASS



### SPECIFICATIONS

Frequency ..... 50-400Hz  
 Insulation class ..... 0.6KV, BIL 10KV Full Wave  
 Flexible leads ..... UL1015 105° C, CSA approved, #16 AWG, 24" long.  
 Weight ..... Approximately 0.5 lb.

### MODEL AL DIMENSIONS (INCHES)

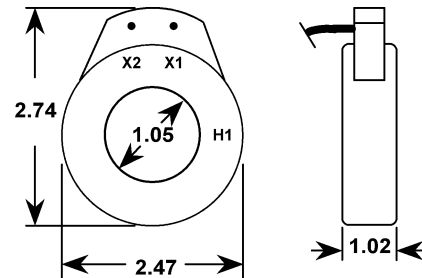

### APPLICATION AND ORDERING DATA

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz
AL-500	50:5	± 3%	2.0
AL-600	60:5	± 2%	2.0
AL-750	75:5	± 2%	2.0
AL-800	80:5	± 2%	2.0
AL-101	100:5	± 1%	2.0
AL-121	120:5	± 1%	2.5
AL-1250	125:5	± 1%	2.5
AL-151	150:5	± 1%	4.0
AL-201	200:5	± 1%	4.0
AL-251	250:5	± 1%	6.0
AL-301	300:5	± 1%	8.0
AL-401	400:5	± 1%	10.0

# SOLID CORE CURRENT TRANSFORMERS

MODEL 7RL

### FEATURES

- UL Recognized
- Window I.D. - 2.50"
- Use with Ammeters, Wattmeters, Relays, and cross current compensation


600V CLASS



### SPECIFICATIONS

Frequency ..... 50-400Hz  
 Insulation class ..... 0.6KV, BIL 10KV Full Wave  
 Flexible leads ..... UL1015 105° C, CSA approved, #16 AWG, 24" long.  
 Weight ..... Approximately 1.5 lb.

### MODEL 7 DIMENSIONS (INCHES)

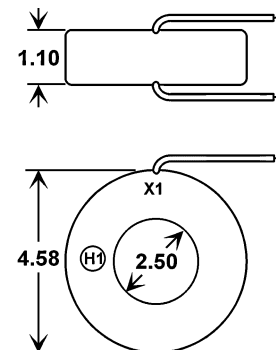

### APPLICATION AND ORDERING DATA

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz
7RL-401	400:5	± 1%	15.0
7RL-501	500:5	± 1%	25.0
7RL-601	600:5	± 1%	30.0
7RL-751	750:5	± 1%	30.0
7RL-801	800:5	± 1%	35.0
7RL-102	1000:5	± 1%	35.0
7RL-122	1200:5	± 1%	35.0
7RL-152	1500:5	± 1%	40.0
7RL-162	1600:5	± 1%	45.0

**FLEX-CORE®**

Div. Morlan & Associates, Inc.  
 6625 McVey Blvd. Columbus, Ohio 43235

WWW.FLEX-CORE.COM  
 flexcore@msn.com

PHONE (614) 889-6152  
 TECH. ASSISTANCE (614) 876-8308  
 FAX # (614) 876-8538