

# CURRENT TRANSFORMERS

## RELAY CLASS SPLIT CORE CURRENT TRANSFORMER MODEL FCR-R822

### FEATURES

- Split Core Design
- Zero Sequence Applications (50A)
- Relaying Applications
- Window I.D. - 8.00" x 22.00"
- Heat Set Polyester and Varnish Construction
- Indoor Use

**600V CLASS**

**MADE IN U.S.A.**




### SPECIFICATIONS

Frequency ..... 60Hz  
 Insulation class ..... 0.6kV, 10kV BIL Full Wave  
 Terminals ..... No. 10-32 Screws with Shorting Strap  
 11" Pounds Max  
 Weight ..... Approximately 120 Lbs.  
 Rating Factor ..... 2.0 @ 30°C  
 Manufactured to meet the requirements of ANSI/IEEE C57.13

APPLICATION AND ORDERING DATA		
CATALOG NUMBER	CURRENT RATIO	RELAY CLASS
FCR50/5-R822	50:5	C10
FCR100/5-R822	100:5	C20
FCR300/5-R822	300:5	C50

### DIMENSIONS

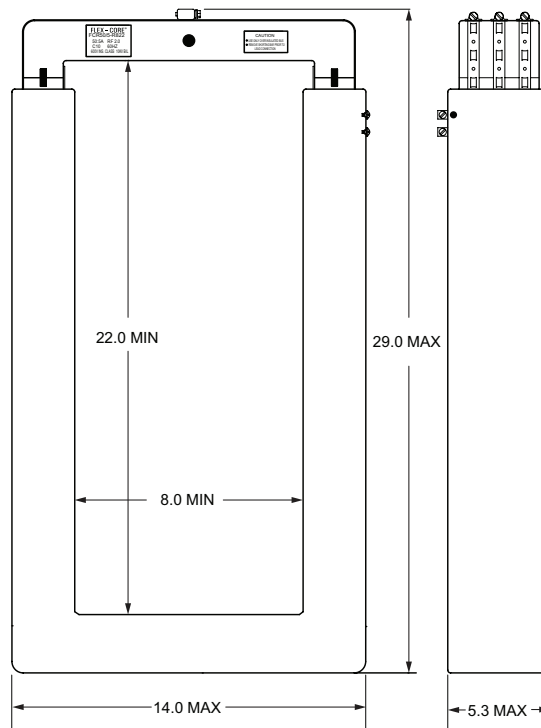

All Dimensions In Inches

**FLEX-CORE®**  
 Div. Morlan & Associates, Inc.  
 4970 Scioto Darby Rd. Hilliard, Ohio 43026

[WWW.FLEX-CORE.COM](http://WWW.FLEX-CORE.COM)  
 sales@flex-core.com

**PHONE** (614) 889-6152  
**TECH. ASSISTANCE** (614) 876-8308  
**FAX #** (614) 876-8538