

# CURRENT TRANSFORMERS

## RELAY/METER CLASS SPLIT CORE CURRENT TRANSFORMER MODEL FCR-R611

### FEATURES

- Split Core Design
- Metering Applications
- Relaying Applications
- Window I.D. - 6.00" x 11.00"
- Heat Set Polyester and Varnish Construction
- Indoor Use

### 600V CLASS

MADE IN U.S.A.




### SPECIFICATIONS

Frequency ..... 60Hz  
 Insulation class ..... 0.6kV, 10kV BIL Full Wave  
 Terminals ..... No. 10-32 Screws with Shorting Strap  
 Recommended Screw Torque ..... 11 in-lbs Max  
 Weight ..... Approximately 20 Lbs.

Manufactured to meet the requirements of ANSI/IEEE C57.13

APPLICATION AND ORDERING DATA								
CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60Hz					RF@30°C
			B0.1	B0.2	B0.5	B0.9	B1.8	
FCR2000/5-R611	2000:5	C100	0.3	0.3	0.3	0.3	0.6	1.0
FCR3000/5-R611	3000:5	C150	0.3	0.3	0.3	0.3	0.3	1.0
FCR4000/5-R611	4000:5	C200	0.3	0.3	0.3	0.3	0.3	1.0

### DIMENSIONS

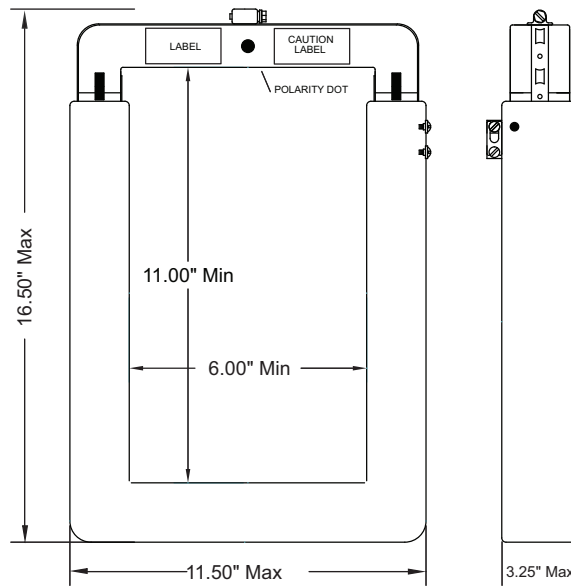

All Dimensions In Inches

**FLEX-CORE®**  
 Div. Morlan & Associates, Inc.  
 4970 Scioto Darby Rd. Hilliard, Ohio 43026

[WWW.FLEX-CORE.COM](http://WWW.FLEX-CORE.COM)  
 sales@flex-core.com

PHONE (614) 889-6152  
 TECH. ASSISTANCE (614) 876-8308  
 FAX # (614) 876-8538