

# CURRENT TRANSFORMERS

## SOLID CORE CURRENT TRANSFORMER

MODEL 2RL

### FEATURES

- UL Recognized
- Window I.D. - 1.05"
- Use with Ammeters

### 600V CLASS




### SPECIFICATIONS

Frequency ..... 50-400Hz  
 Insulation Class ..... 0.6kV, 10kV BIL Full Wave  
 Flexible Leads ..... UL1015, 105°C, CSA approved, 16 AWG, 24"  
 Weight ..... Approximately 0.5 Lb.

#### APPLICATION AND ORDERING DATA

| CATALOG NUMBER | CURRENT RATIO | ACCURACY AT 60Hz | BURDEN VA AT 60Hz |
|----------------|---------------|------------------|-------------------|
| 2RL-500        | 50:5          | ±3%              | 2.0               |
| 2RL-600        | 60:5          | ±2%              | 2.0               |
| 2RL-750        | 75:5          | ±2%              | 2.0               |
| 2RL-800        | 80:5          | ±2%              | 2.0               |
| 2RL-101        | 100:5         | ±1%              | 2.0               |
| 2RL-121        | 120:5         | ±1%              | 2.5               |
| 2RL-1250       | 125:5         | ±1%              | 2.5               |
| 2RL-151        | 150:5         | ±1%              | 4.0               |
| 2RL-201        | 200:5         | ±1%              | 4.0               |
| 2RL-251        | 250:5         | ±1%              | 6.0               |
| 2RL-301        | 300:5         | ±1%              | 8.0               |
| 2RL-401        | 400:5         | ±1%              | 10.0              |

### DIMENSIONS

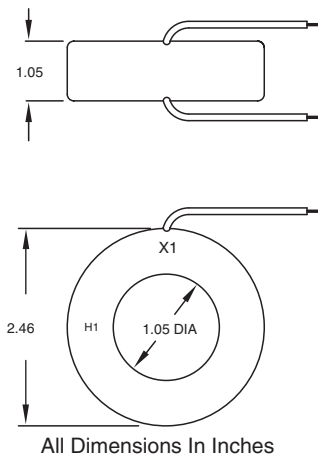

All Dimensions In Inches


## SOLID CORE CURRENT TRANSFORMER

MODEL 7RL

### FEATURES

- UL Recognized
- Window I.D. - 2.50"
- Use with Ammeters and Watt Meters

### 600V CLASS




### SPECIFICATIONS

Frequency ..... 50-400Hz  
 Insulation Class ..... 0.6kV, 10kV BIL Full Wave  
 Flexible Leads ..... UL1015, 105°C, CSA approved, 16 AWG, 24"  
 Weight ..... Approximately 1.5 Lbs.

#### APPLICATION AND ORDERING DATA

| CATALOG NUMBER | CURRENT RATIO | ACCURACY AT 60Hz | BURDEN VA AT 60Hz |
|----------------|---------------|------------------|-------------------|
| 7RL-301        | 300:5         | ±1%              | 12.5              |
| 7RL-401        | 400:5         | ±1%              | 15.0              |
| 7RL-501        | 500:5         | ±1%              | 25.0              |
| 7RL-601        | 600:5         | ±1%              | 30.0              |
| 7RL-751        | 750:5         | ±1%              | 30.0              |
| 7RL-801        | 800:5         | ±1%              | 35.0              |
| 7RL-102        | 1000:5        | ±1%              | 35.0              |
| 7RL-122        | 1200:5        | ±1%              | 35.0              |
| 7RL-152        | 1500:5        | ±1%              | 40.0              |
| 7RL-162        | 1600:5        | ±1%              | 45.0              |

### DIMENSIONS

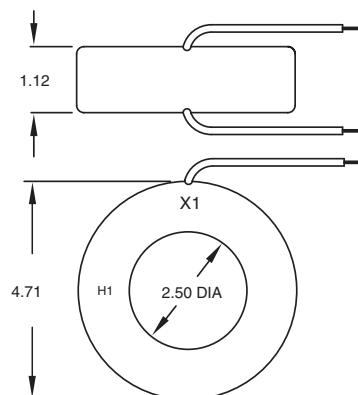

All Dimensions In Inches

**FLEX-CORE®**

Div. Morlan & Associates, Inc.

4970 Scioto Darby Rd. Hilliard, Ohio 43026

WWW.FLEX-CORE.COM

sales@flex-core.com

PHONE (614) 889-6152

TECH. ASSISTANCE (614) 876-8308

FAX # (614) 876-8538