

DIGITAL PANEL METERS

DIGITAL AMMETER

MODEL DL-40PSF-DR-PS1-IA05

Digital Meter for Monitoring and Measuring

FEATURES

- 4 Digit Red Led (0.56") with display range -1999 to 9999 (12000 counts)
- Auto-sensing AC/DC Power Supply
- Automatic Intelligent averaging smooths noisy signals
- Fast display response to real input signal changes
- User programmable input to display ratios
- Peak and Valley - View and Reset

SPECIFICATIONS

- Input 0-5Aac Scaled RMS
- Accuracy $\pm 0.05\%$ of reading, ± 2 digit
- Inst. Power 85-265Vac/95-300Vdc
- Enclosure 1/8 DIN CASE
- Screw Terminal Adapter Included for inputs and power.
- Weight Approximately 1 lb.
- Dimensions Meter Case Width 3.45" (95.44mm)
Height 1.6" (41.1mm)
Max Depth 4.61" (117mm)
Bezel 3.78" X 1.89" (96 X 48mm)
Panel Cutout 3.62" X 1.77" (92 X 45mm)
- LED display -1999 to +9999
7 Segment, 0.56", 4 Digit


Program Button: This button is used to move from one program step to the next. When used simultaneously with the UP ARROW button, it initiates the Programming mode. When used simultaneously with the DOWN ARROW button, it initiates the Set point Program Mode.

Up Arrow: Increases the value of the displayed parameter.


Down Arrow: Decreases the value of the displayed parameter.



CONNECTOR PINOUTS

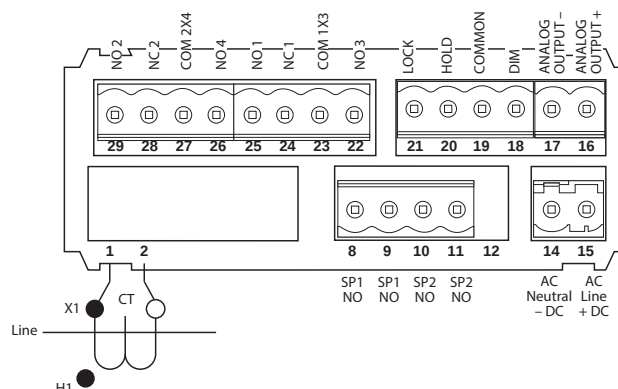

DIMENSIONS

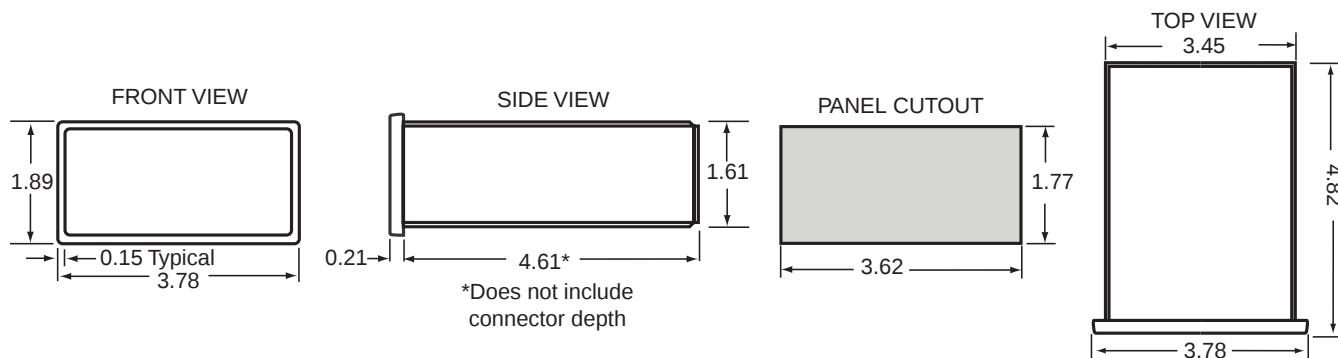

All Dimensions In Inches

FLEX-CORE®

Div. Morlan & Associates, Inc.

4970 Scioto Darby Rd. Hilliard, Ohio 43026

WWW.FLEX-CORE.COM

sales@flex-core.com

PHONE (614) 889-6152

TECH. ASSISTANCE (614) 876-8308

FAX # (614) 876-8538