

CURRENT TRANSFORMERS

RELAY/METER CLASS CURRENT TRANSFORMER *MODEL 130*

FEATURES

- UL Recognized
- Window I.D. - 5.75"
- Relaying and Metering Applications




SPECIFICATIONS

Frequency 50-400Hz
Insulation Class 0.6kV, 10kV BIL Full Wave
Terminals Brass Studs No. 8-32 UNC
 with one flat washer, lock washer and regular nut.
Weight Approximately 18 Lbs.
Mounting Bracket..... P/N 0221B00186
Manufactured to meet the requirements of ANSI/IEEE C57.13


APPLICATION AND ORDERING DATA

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60Hz					Secondary Winding Resistance (Ω @75°C)	Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@30°C	@55°C
130-201	200:5	C10	0.6	0.6	2.4	2.4	4.8	0.064	2.0	2.0
130-301	300:5	C20	0.3	0.3	1.2	1.2	2.4	0.105	2.0	2.0
130-401	400:5	C20	0.3	0.3	0.6	1.2	1.2	0.140	2.0	2.0
130-501	500:5	C20	0.3	0.3	0.3	0.6	1.2	0.175	2.0	2.0
130-601	600:5	C20	0.3	0.3	0.3	0.6	1.2	0.210	2.0	1.5
130-801	800:5	C50	0.3	0.3	0.3	0.3	0.6	0.324	2.0	1.5
130-102	1000:5	C50	0.3	0.3	0.3	0.3	0.3	0.404	1.5	1.33
130-122	1200:5	C100	0.3	0.3	0.3	0.3	0.3	0.485	1.5	1.0
130-152	1500:5	C100	0.3	0.3	0.3	0.3	0.3	0.607	1.5	1.0
130-162	1600:5	C100	0.3	0.3	0.3	0.3	0.3	0.647	1.33	1.0
130-202	2000:5	C100	0.3	0.3	0.3	0.3	0.3	0.783	1.33	1.0
130-252	2500:5	C100	0.3	0.3	0.3	0.3	0.3	0.979	1.0	0.8
130-302	3000:5	C100	0.3	0.3	0.3	0.3	0.3	1.175	1.0	0.8
130-402	4000:5	C100	0.3	0.3	0.3	0.3	0.3	1.484	1.0	0.6

DIMENSIONS

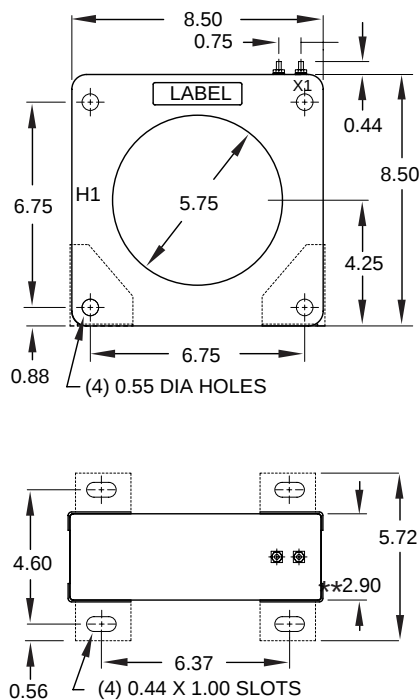

EXCITATION CURVE

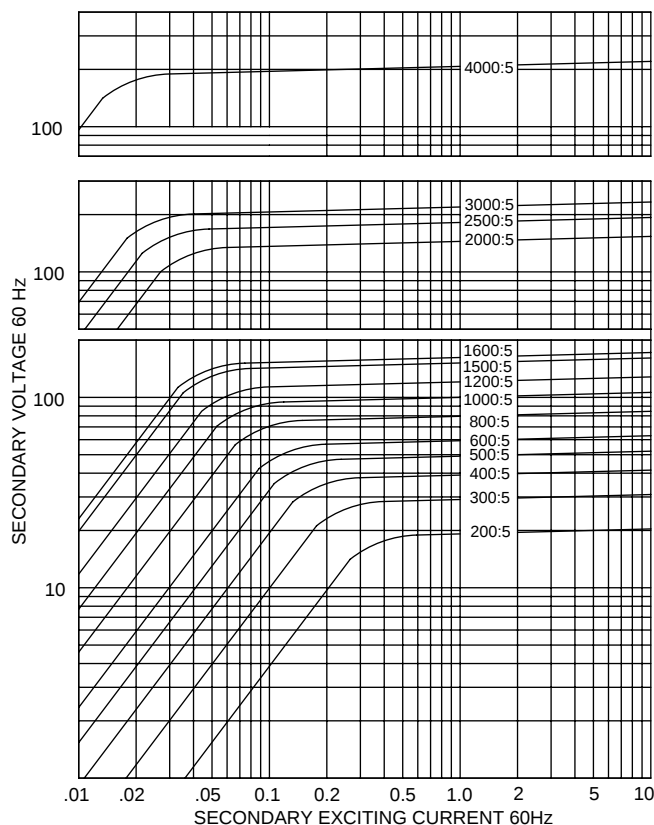

** Shown with optional mounting brackets: P/N #0221B00186

All Dimensions In Inches

FLEX-CORE®

Div. Morlan & Associates, Inc.

4970 Scioto Darby Rd. Hilliard, Ohio 43026

WWW.FLEX-CORE.COM

sales@flex-core.com

PHONE (614) 889-6152

TECH. ASSISTANCE (614) 876-8308

FAX # (614) 876-8538