

CURRENT TRANSFORMERS

OUTDOOR CURRENT TRANSFORMER

MODELS JCK-3, JCK-4

SPECIFICATIONS

Designed for outdoor service.

Suitable for metering applications.

Insulation Level..... (JCK-3) 5kV, 60kV BIL
(JCK-4) 8.7kV, 75kV BIL

ANSI Accuracy Classification, 60Hz

B0.1 and B0.2 all models.....0.3

B0.5 all models except 753X0510010.3

Optional Secondary Conduit Box 9689897001

Weight Approximately 43 Lbs.




Manufactured to meet the requirements of ANSI/IEEE C57.13



APPLICATION AND ORDERING DATA

CATALOG NUMBER		CURRENT RATIO (AMPS) PRI:SEC	CONTINUOUS THERMAL RATING FACTOR 30°C AMBIENT	MECHANICAL LIMIT; AMPERES	ONE-SECOND THERMAL LIMIT, AMPERES
JCK-3 5,000V BIL 60kV	JCK-4 8,700V BIL 75kV				
753X051001	754X051001	5:5	3.0	3,400	1,900
753X051002	754X051002	10:5	3.0	3,400	1,900
753X051003	754X051003	15:5	3.0	5,100	2,850
753X051004	754X051004	20:5	3.0	6,800	3,825
753X051005	754X051005	25:5	3.0	8,500	4,775
753X051006	754X051006	30:5	3.0	10,200	5,725
753X051007	754X051007	40:5	3.0	13,600	7,650
753X051008	754X051008	50:5	3.0	17,000	9,550
753X051009	754X051009	75:5	3.0	21,250	11,775
753X051010	754X051010	100:5	3.0	34,000	19,125
753X051011	754X051011	150:5	3.0	42,500	23,575
753X051012	754X051012	200:5	3.0	56,100	38,250
753X051013	754X051013	300:5	3.0	85,000	46,750
753X051014	754X051014	400:5	2.5	85,000	47,600
753X051015	754X051015	600:5	2.0	85,000	51,000
753X051016	754X051016	800:5	1.5	85,000	51,000

DIMENSIONS

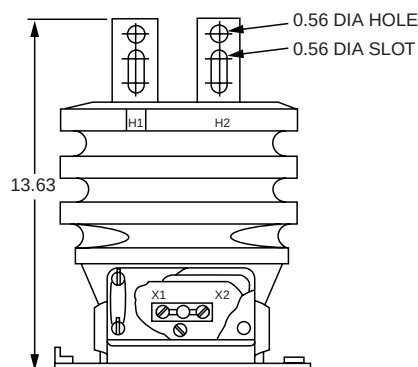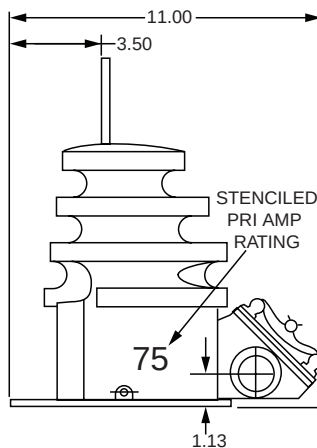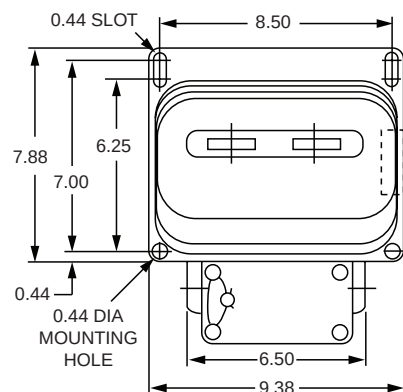

All Dimensions In Inches

FLEX-CORE®

Div. Morlan & Associates, Inc.

4970 Scioto Darby Rd. Hilliard, Ohio 43026

WWW.FLEX-CORE.COM

sales@flex-core.com

PHONE (614) 889-6152

TECH. ASSISTANCE (614) 876-8308

FAX # (614) 876-8538